



SIMQAM LLC
 P.O. Box 472, Lodi,
 New Jersey 07644, U.S.A
www.simqam.com

Tel: +1 (201) 338-2763
 +1 (201) 338-5424
 Fax: +1 (201) 374-4767
info@simqam.com

FOOT VALVES


Spring-Loaded Foot Valves – Drain Standard



3/4" Drain Coupler
 Standard On
 Foot Valves

			No. 3020	No. 3021				No. 3030	No. 3031	
			NEW RUBBER-TO-RUBBER SEAT	FLANGED GALV. BARREL & SCREEN	FLANGED ENAMELED BARREL & SCREEN				FLANGED GALV. BARREL & SCREEN	FLANGED ENAMELED BARREL & SCREEN
SIZE	WT.	VALVE LENGTH				SIZE	WT.	VALVE LENGTH		
6"	31	21.63"				4"	22	19.88"		
8"	42	22.25"				5"	26	21.75"		
10"	58	24.00"				6"	31	21.63"		
*12"	75	23.75"				8"	42	22.25"		
*12" Flanges with 10" Body						10"	58	24.00"		
12"	102	30.25"				*12"	75	23.75"		
NEW – Full 12" Opening						*12" Flanges with 10" Body				

			No. 3022	No. 3023				No. 3032	No. 3033	
			NEW RUBBER-TO-RUBBER SEAT	BARE WITH GALV. BARREL & SCREEN	BARE WITH ENAMELED BARREL & SCREEN				BARE GALV. BARREL & SCREEN	BARE ENAMELED BARREL & SCREEN
SIZE	WT.	VALVE LENGTH				SIZE	WT.	VALVE LENGTH		
6"	23	21.00"				4"	16	19.13"		
8"	32	21.88"				5"	18	21.13"		
10"	45	23.50"				6"	23	21.00"		
*12"	47	23.50"				8"	32	21.88"		
*12" Cones with 10" Body						10"	45	23.50"		
12"	66	29.50"				*12"	47	23.50"		
NEW – Full 12" Opening						*12" Cones with 10" Body				

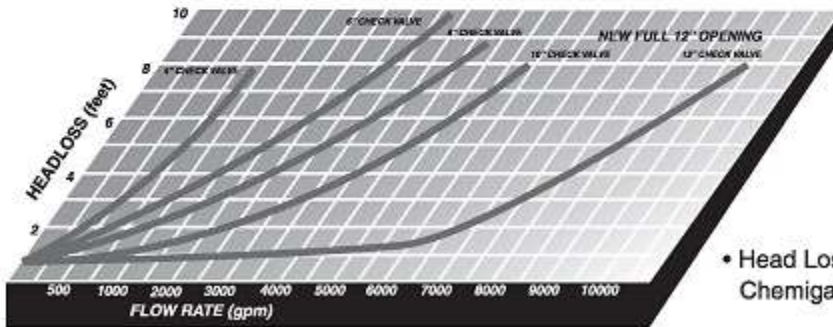

- Head Loss Chart for Check and Chemigation Valves
- Two Feet of Head is Required to Open the Gates on Foot, Check, and Chemigation Valves